

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/006749

International filing date: 28 February 2005 (28.02.2005)

Document type: Certified copy of priority document


Document details: Country/Office: US  
Number: 60/550,550  
Filing date: 05 March 2004 (05.03.2004)

Date of receipt at the International Bureau: 07 April 2005 (07.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

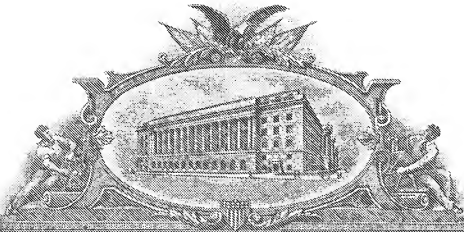

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

*March 24, 2005*

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/550,550

FILING DATE: *March 05, 2004*

RELATED PCT APPLICATION NUMBER: PCT/US05/06749



Certified by

Under Secretary of Commerce  
for Intellectual Property  
and Director of the United States  
Patent and Trademark Office


**PROVISIONAL APPLICATION FOR PATENT COVER SHEET**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR §1.53(c).

<b>INVENTOR(S)</b>					
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)			
Joseph J. Robert D.	Cuneo Goldbach	South Orange, NJ South Orange, NJ			
Additional inventors are being named on the <u>0</u> separately numbered sheets attached hereto					
<b>TITLE OF THE INVENTION (500 characters max)</b>					
Support Assemblies and Systems for Semi-Membrane Tanks					
<b>CORRESPONDENCE ADDRESS</b>					
Direct all correspondence to:					
<input checked="" type="checkbox"/> Customer Number: <span style="float: right;">26211</span>					
<b>OR</b>					
<input type="checkbox"/> Firm or Individual Name					
Address					
Address					
City		State	ZIP	Fax	
Country		United States	Telephone		
<b>ENCLOSED APPLICATION PARTS (check all that apply)</b>					
<input checked="" type="checkbox"/> Specification		Number of Pages	15	<input type="checkbox"/> CD(s), Number	
<input checked="" type="checkbox"/> Drawing(s)		Number of Sheets	8	<input checked="" type="checkbox"/> Other (specify) <span style="border: 1px solid black; padding: 2px;">Cover Sheet; claims; abstract</span>	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76.					
<b>METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT</b>					
<input checked="" type="checkbox"/> Applicant Claims small entity status. See 37 CFR 1.27.					
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees.					
<input type="checkbox"/> The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:			<div style="border: 1px solid black; padding: 2px; display: inline-block;">06-1050</div> <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-left: 20px;">\$80</div>		
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are:					

Respectfully submitted,

Signature

Date March 5, 2004Typed Name William J. Hone, Reg. No. 26,739Telephone No. (212) 765-5070Docket No. 08126-004P01

30180745.doc

**CERTIFICATE OF MAILING BY EXPRESS MAIL**Express Mail Label No. ET931345125USDate of Deposit March 5, 2004

PROVISIONAL APPLICATION FOR PATENT

under

37 CFR §1.53(c)

TITLE: SUPPORT ASSEMBLIES AND SYSTEMS FOR SEMI-MEMBRANE TANKS

APPLICANT: JOSEPH J. CUNEO and ROBERT D. GOLDBACH

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. ET931345125US

March 5, 2004  
Date of Deposit

## Support Assemblies and Systems for Semi-Membrane Tanks

### **TECHNICAL FIELD**

This invention relates to systems for supporting the sidewalls and tops of semi-membrane tanks used to store and transport liquids at temperatures substantially differing from ambient temperatures, including particularly for liquids such as liquefied natural gas (LNG), liquefied petroleum gas and anhydrous ammonia, which may be stored and transported at temperatures substantially below ambient temperature. The invention can also be applied to semi-membrane tanks for the containment of liquids stored and transported at temperatures substantially higher than ambient temperatures.

### **BACKGROUND**

Semi-membrane tanks are not self-supporting. Their sidewalls require support from a surrounding support structure. U.S. Patent 5,727,492 describes semi-membrane tanks having sidewalls of curved-plate construction, although flat-plate construction with relatively light stiffening members may also be used for semi-membrane tanks. In either case a surrounding support structure is required. As described in U.S. Patent 5,727,492, surrounding support structure may include the inner hull of a double-hulled tanker or a grid of beams supporting a storage tank, for example, in a land-based facility. Semi-membrane tank sides and top are connected to the surrounding support structure through insulating supports or support assemblies.

The bottom of a semi-membrane tank normally is of flat-plate construction and rests on load-bearing insulation that in turn rests on underlying support structure. The tank bottom and load bearing insulation may be flat, as in one horizontal plane parallel to the underlying support structure or in several sloped planes oriented towards a fixed point to facilitate drainage. Typically the tank bottom will contract and expand about said fixed point which is normally located either at its geometric center or at another point vertically aligned with an expansion dome on the top of the tank. Such fixed point is typically maintained at a fixed location by a combination of structural keys affixed to the external surface of the tank bottom. The keys extend radially from said fixed point and mate with keyways in the load-bearing insulation normally oriented along the transverse and longitudinal axes of the tank. With changes in temperature as the tank is filled and

longitudinal axes of the tank. With changes in temperature as the tank is filled and emptied, the tank bottom contracts and expands by sliding over the load bearing insulation against which it is held by gravity.

The temperature of the sidewalls of the tank and the tank top also deviate significantly from the normally ambient temperature of the surrounding support structure as the tank is filled. This thermal deviation causes shrinkage, if the tank is used for cold liquid, and tends to subject the tank to significant thermal stresses. The method of support between the tank and surrounding support structure will significantly influence the level and distribution of these thermal stresses.

Insulation systems typically are secured directly to tank surfaces after tank construction is substantially complete. Insulated support systems for semi-membrane tanks are typically attached directly to surrounding support structure which is made integral with longitudinal and transverse structure in the case of a shipboard installation.

Published U.S. Patent Application Publication No. 2003/0066834A1 describes an array of support assemblies for use in a support system for semi-membrane tank. The assemblies are the components intermediate to the tank walls and the surrounding support structure. Assemblies of that published patent application include three components or blocks: a first block rigidly attached to a tank wall, a second block rigidly attached to the surrounding support structure, and a third block intermediate to the first two. The third block slidably engages the first block, permitting sliding movement along a first line parallel to the plane of the tank wall, and the third block slidably engages the second block, permitting sliding movement along a second line, perpendicular to the first, also parallel to the plane of the tank wall. In combination, the two sliding movements permit orthogonal movement, in the plane of tank wall, of the tank wall relative to the support structure. The support system prevents inward and outward movement perpendicular to the sidewalls and top of the tank.

If one considers a rectangular tank having four sidewalls, a top and a bottom, it will be appreciated that unrestrained thermal contraction resulting from lowered temperatures causes each of those six members to contract in its plane. In effect the tank attempts to become smaller by pulling inwardly away from the surrounding support structure to which it is attached by a support system. Walls of semi-membrane tanks

must have at least fixed points aligned with the fixed expansion dome projecting through the top. Further, the walls and top, which are not self-supporting, must be supported vertically, and the walls must also be supported perpendicular to their respective planes. The support system of, for example, U.S. Patent Publication 2003/0066834A1 permits only contraction in the plane of each wall and prevents inward movement away from the support structure. Certain support assemblies are fixed against vertical movement of the walls and therefore, support the tank walls. The restriction against motion perpendicular to the plane of each wall imposes substantial thermal stresses at the edges where a tank wall meets the top, the bottom or another wall. These intersections must therefore be both sufficiently flexible to accommodate contraction and sufficiently robust to afford acceptable stress levels in the tank structural material. Flexibility is typically achieved by utilizing edges having substantial curved cross-sectional shapes that are capable of accepting considerable distortion as the tank contracts. The radius of curvature must be sufficiently large to permit such distortion without reaching unacceptable stress. The thickness of the structural material of the curved edges must be sufficiently thick and strong so as to prevent buckling and to maintain acceptable stress levels under all temperature conditions caused by the tank being full, empty or partially full. Small-radius curved edges of relatively lightweight construction are inadequate for this purpose, because of the magnitude of stress levels.

It is the object of the present invention to provide a support arrangement for semi-membrane tank walls and top that provides a thermally insulated structural attachment between the tank and its surrounding support structure that overcomes the disadvantages of existing arrangements and improves the efficiency of constructing and installing such tanks.

### SUMMARY

An aspect of this invention is support assemblies that permit a wall or top of a semi-membrane tank to move in and out perpendicularly to the plane of the wall or top and simultaneously accommodate shrinkage and expansion of the wall or top in either one line in the plane of the wall or top or in perpendicular lines in that plane.

Deployment of support assemblies according to this invention in arrays across semi-membrane tank walls provides support for the walls, including needed vertical

support, while minimizing thermally induced stresses at edges formed by the intersection of a wall with the top, bottom or another wall.

Yet another aspect of the present invention is arrays of support assemblies that permit a reduction in the radius of curvature of tank edges as compared to existing  
5 systems discussed above, with a concomitant increase in tank volume, and that further permit a reduction in the amount of tank structural material, thereby simplifying construction and reducing construction costs.

Another aspect of the present invention is utilizing support assemblies to secure sheets or panels of tank insulation in place, for example, the use of flanged devices  
10 securing support assemblies to the tank in combination with flanged collars secured to the support assemblies to which insulation panels are secured to minimize heat transfer to the tank.

Yet another aspect of the present invention is a support system for the walls of a semi-membrane tank and, optionally, the tank bottom, that includes the surrounding  
15 support structure and means for slidably engaging the surrounding support structure with an outer containment structure such as a tanker's inner hull or a shore installation's outer frame constructed on site, for example the attachment of vertical keys to the tank support systems for walls, which keys slidably engage keyways attached to the surrounding ship structure. This aspect simplifies tank installation by securing the tank walls and bottom,  
20 for example, the surrounding ship structure by the simple act of engaging the keys and keyways as the surrounding support structure containing the tank is lowered into the ship's hull. Keys and keyways in the preferred embodiment are preferentially tapered in cross section and as well as vertically to facilitate engagement as the tank and surrounding support structure are lowered into the surrounding ship or shore-based  
25 structure.

A feature of this invention is that the walls and top are allowed a relatively minor deviation from plane at low temperature.

In this application and the appended claims, certain terms have the meanings that follow:

30 "Wall" means a vertically oriented sidewall of a semi-membrane tank. Walls of semi-membrane tanks are arranged in a geometric pattern, for example, a rectangular,



trapezoidal or hexagonal or cylindrical tank. Walls of such tanks are planar, if made of flat plates, or approximately planar, if constructed from curved plates. Such walls are referred to in this application variously as “flat” or “planar”. A cylindrical tank has one continuous wall forming the cylinder.

5 “Plane of a wall” means the major planar outer surface at ambient temperature of a straight-sided wall of flat-plate construction or the vertical plane through the cusps joining curved plates in such a wall.

“Plane of a top” means the major planar outer surface of a tank top at ambient temperature.

10 “Surrounding support structure” is the structure to which support assemblies are attached away from the tank. Surrounding support structure may, or may not be integral with the outer containment structure such as the surrounding ship structure. Alternatively, surrounding support structure may be a lifting frame, a framework in which a tank is assembled. The surrounding support structure may be fitted with vertical keys  
15 which engage keyways integral with said outer containment structure, or vice versa, as a tank is lowered into its final location.

“Outer containment structure” is the structure outside surrounding support structure, if they are not one and the same. For walls in a tanker installation is commonly the inner longitudinal hull structure and the transverse hull bulkhead structure including  
20 bracing members attached thereto, and for the top is commonly the main deck of a double hull tanker. Outer containment structure for walls in a shore installation is commonly a framework of interconnected beams extending upwardly from a concrete base on the ground.

“Ramp” means an angled surface projecting outwardly from the tank that  
25 slidably engages a complementary surface supported by the surrounding support structure. This surface may be planar or may have one degree of curvature with its axis parallel to the angle of the ramp. Movement “along the ramp” means movement up or down the ramp parallel to the axial centerline of the ramp surface. Movement “across the ramp” or “cross-ramp” means movement parallel to the ramp surface but in a direction  
30 perpendicular to the axial centerline of the ramp surface, if the ramp surface is flat, or parallel to the chord of the arc of the surface, if the surface is curved. Movement up or

down a ramp can be broken into two perpendicular components of Cartesian coordinates, for example a component along an x axis and a component along a y axis. If a ramp is placed horizontally on a vertical surface, one component of movement parallel to the ramp is horizontal and parallel to the plane of the wall and the other component is also horizontal but perpendicular to the plane of the wall; and movement across the ramp is vertical and parallel to the plane of the wall. If a ramp is placed vertically on a vertical surface, one component of movement parallel to the ramp is vertical and parallel to the plane of wall or to the axis of the cylinder, if the tank is cylindrical, and the other component is horizontal but perpendicular to the plane of the wall or to the axis of the cylinder; and movement across the ramp is horizontal and parallel to the plane of the wall or the tangent of a cylindrical wall.

“Ramped away” from a point or line in a tank wall or top means for a support assembly that the member attached to the tank wall or top has a ramp surface acutely angled toward that point or line.

“Support assembly” means an assemblage of interlocked structural components or members spaced between the tank wall or top and the surrounding support structure that together allow for attachment of the wall or top to the surrounding support structure.

Support assemblies according to this invention permit a tank wall or top to move relative to the surrounding support structure in at least two directions, namely, in one direction perpendicular to the plane of the wall or top or to the axis of the cylinder of a cylindrical wall, that is, inwardly away from the support structure as the tank shrinks and outwardly toward the support structure as the tank expands; and in at least one direction parallel to the plane of the wall or top or to the axis of the cylinder of a cylindrical wall, that is, toward a fixed point or a line in the plane of the wall or toward the axis of the cylinder as the wall or top shrinks and away from such a point as the tank expands. Movement in two directions is accomplished by means of a “two dimension” support assembly that is angled relative to those two directions of movement and permits movement along the ramp. As the wall or top shrinks in the plane of the wall or top, or as a cylindrical wall shrinks, the ramp attached to the wall or top translates relative to its complementary surface, thereby deflecting the ramp inwardly perpendicular to the plane of the wall or top or toward the axis of a cylindrical wall. By appropriately sizing the

ramping angle, appropriate inward deflection obtains for minimizing stress at points which otherwise would be subjected to the highest thermal stresses. Thus, a ramp near a fixed point, for example, the midpoint of a flat wall's length, will translate a shorter distance in the plane of the wall and thereby deflect a shorter distance perpendicular to that plane than will a ramp further out from said fixed point, thereby accommodating the greater amount of deflection of the latter as the tank shrinks. In this way positive inward support of a tank wall or top away from the surrounding support structure is maintained as the tank shrinks and expands while the tank wall or top is prevented from moving outwardly due to mechanical forces, such as rolling or pitching of a ship or the pressure of liquid cargo, at all temperatures. Calculating ramp angles is a matter of design based on the thermal properties of a wall or top and specific tank geometry and is within the skill of the art. Placed horizontally, two dimension support assemblies provide vertical support for the tank wall.

Other support assemblies according to this invention additionally permit movement in the plane of the wall or top perpendicular to the first direction. These assemblies, therefore, permit orthogonal movement in the plane of wall or top as well as movement perpendicular to the plane of the wall or top. The added degree of freedom of movement is provided by a "three dimension" support assembly.

Support assemblies according to this invention can be included in arrays of supports between tank walls or top and the surrounding support structure. Each array for a planar wall or top includes a "center of thermal fixity" which is either a point of rigid attachment or a point which has no thermal movement. The center of thermal fixity for each such wall will be at a common height above the tank bottom and horizontally aligned with the fixed point of the top determined by the expansion dome, namely the center point of the dome. Each planar wall array will further include a row of support assemblies extending horizontally away from the center of thermal fixity in both directions. Each support assembly in this row is a two dimension support assembly which permits movement only along the ramp, and the ramp member is rigidly attached to the tank with the ramp surface oriented horizontally away from the fixed point, that is, travel up the ramp is travel away from the center of thermal fixity. Each support assembly in this row provides vertical support for the tank wall, as vertical movement of

the wall relative to the support structure is not permitted. Each array for a cylindrical wall includes a "circle of thermal fixity" located at or near the bottom of the wall. Each array for a cylindrical wall will include a multitude of two dimension support assemblies disposed vertically in a pattern over the surface of the wall, preferably along a series of vertical lines spaced around the wall.

Each array for a planar wall or top also includes additional support assemblies according to this invention. Those additional assemblies may be either two dimension support assemblies, in which case the ramps are oriented radially away from the center of thermal fixity, or three dimension support assemblies, in which case the ramps are in horizontal rows and oriented horizontally away from a vertical line through the center of thermal fixity. Similar arrays may be used for the tank top.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

## DESCRIPTION OF DRAWINGS

FIG. 1 is an exploded perspective view of a two member embodiment of a two dimension support assembly according to this invention.

FIG. 2 is a perspective view of a two member embodiment of a three dimension support assembly according to this invention.

FIG. 3 is an exploded perspective of a three-member embodiment of a three dimension support assembly according to this invention.

FIG. 4 is an elevation showing a preferred embodiment for interlocked attachment of either a two dimension support assembly or a three dimension support assembly to a tank wall or top and surrounding support structure. FIG. 4 also shows means of securing fitted insulation panels between flanges that retain support assemblies against tank and flanged collars secured to support assemblies.

FIG. 5 is a side view of a semi-membrane tank, surrounding support structure, and a first embodiment of an array of support assemblies according to this invention.

FIG 6 is a side view of a semi-membrane tank, surrounding support structure, and a second embodiment of an array of support assemblies according to this invention.

FIG 7 is a top view of a semi-membrane tank, surrounding support structure, depicting an embodiment which includes a radial array of support assemblies for the top  
5 of the tank.

FIG 8 is a top view of wall assemblies depicting a preferred embodiment for a surrounding support structure that is attached to the outer member of several aligned support assemblies. FIG 8 further depicts vertical keys which attach to surrounding support structure for sidewalls and engage vertical keyways integral with an outer  
10 containment structure such as a ship structure.

Like reference symbols in the various drawings indicate like elements.

### DETAILED DESCRIPTION

Support systems according to this invention include arrays of support assemblies, preferably two member support assemblies, distributed over the top and each side wall  
15 and connecting each wall or top to surrounding support structure by sliding engagement so as to permit each point of such engagement of assembly member attached to said wall or top to move inwardly perpendicular to the plane of the wall or top and toward the center of thermal fixity in the plane of said wall or top when the tank cooled, either from  
20 ambient temperature to below ambient temperature for a cold tank such as an LNG tank or from heated temperature to ambient temperature for a hot tank. This array may but need not include a fixed support at which each wall or top is rigidly attached to surrounding support structure. Depending on the design of the array and the orientation of the support assemblies, particular assemblies accommodate either one or two degrees  
25 of freedom parallel to the plane of the wall or top to permit the required movement. At least some of the support assemblies, which necessarily accommodate only one such degree of freedom, provide the vertical support required for each wall. Tops of semi-membrane tanks most commonly have the center of thermal fixity at the geometric center of the top, where the expansion dome penetrates the tank.

FIG. 1 depicts a support assembly 1 according to this invention. Support  
30 assembly 1 is a two dimension support. It maintains rigid support between a tank wall or

top while at the same time permitting thermally induced movement of the wall relative to the surrounding support structure only along the ramp, which, as previously explained, includes a component of movement perpendicular to the plane of a tank wall or top and a component of movement along a line in the plane of the tank wall or top parallel to the axis of the ramp. Support assembly 1 is shown disassembled. It includes a first member 2 and a second member 3 that may be slidingly engaged. One of members 2, 3 is fixedly attachable to a tank wall or top structure 7, and the other of members 2, 3 is fixedly attachable to the surrounding support structure 8. Attachment may be direct or indirect, as through load-bearing insulation.

Member 2 is a three dimensional elongated solid T-shaped piece wherein top portion 4 of the elongated "T" is ramped outwardly from element 8 as shown or, alternatively, from element 7 (not shown). Elongated portion 4 includes ramped surfaces 5 and 6. Member 3 is a solid piece that is complementary to member 2. It includes an elongated, T-shaped ramped recess 9 that is ramped outwardly from element 7 as shown or, alternatively, from element 8 (not shown). Recess 9 has top surface 10 that slidingly engages surface 5 of member 2 and bottom surfaces 11 that slidingly engages surfaces 6, whereby portion 4 can move along the ramp inside recess 9. Recess 9 has elongated sidewalls 12 that slidingly engage elongated sidewalls 13 of portion 4.

Member 3 surrounds portion 4 of member 2. Sidewalls 12 of member 3 prevent cross ramp movement. Bottom surfaces 11 interlock with bottom surfaces 6 to prevent relative movement of members 2, 3 perpendicularly to the ramp, that is, perpendicularly to the plane of the tank wall or top except as occurs by sliding along the ramp.

Other means may be utilized to interlock members 2, 3 to prevent their separation perpendicular to the ramp. Preferred interlocking means, such as shown in FIG. 1, interlock members 2, 3 directly. Other such means would include, for example, T-shaped ramps not only for member 2, but also for member 3, flanges projecting outwardly from each ramp element 4, and slidingly engageable U-shaped members interlocking the flanges of member 2 and the flanges of member 3. Less preferred interlocking means may be only indirectly connected to members 2, 3, as, for example, a tie bar angled between and pivotally secured to wall or top structure 7 and surrounding support structure 8 so as to hold members 2, 3 together but pivot as necessary so as not to prevent

movement along the ramp of member 3 relative to member 2. When the U-shaped additional members are in place, or when tie bar or other indirectly connected additional member is in place, members 2, 3 are effectively interlocked.

It is important that the walls and top of a semi-membrane tank be thermally isolated from the surrounding support structure and any outer containment structure to prevent heat flow into a chilled tank or out of a hot tank. Conductive heat paths are minimized or, in preferred embodiments, eliminated to the extent possible. For this purpose, support assemblies may be made of insulating material, such as, for example, wood or wood composite material. Member 2, 3 may be fabricated from insulating material. However, portions of members 2, 3, particularly ramping faces 5, 6, 10, 11 may advantageously be metal, such as aluminum, steel or stainless steel. It is essential only that there be insulation blocking the thermal pathway between the tank and the surrounding support structure. Otherwise heat-conducting materials may be used without compromising thermal isolation.

FIG. 2 depicts a support assembly 21 according to this invention. Assembly 21 is an interlocked two-member, three dimension support assembly. It is constructed the same as support assembly 1 (FIG. 1) and operates the same with one exception, namely, that recess 9 is widened such that its elongated sidewalls 22 do not prevent, but rather permit, cross ramp movement to the extent calculated to be necessary by the designer, considering thermal contraction and expansion of the tank. Thus, orthogonal movement in the plane of the tank wall or top is accommodated. The embodiment shown in FIG. 2 is, as stated, a three dimension support assembly comprised of two members. Movement across the ramp may also be provided by means of a third member. Such an assembly according to this invention is shown in FIG. 3. Support assembly 31 comprises members 2, 3 as in FIG. 1 with the exception that member 3 additionally includes, proximate its away-from-the-ramp surface, grooves 33 and flanges 36 that project oppositely in the direction of the ramp axis. Fixedly secured to element 7, as shown or element 8 (not shown) is third member 34, which includes spaced inwardly facing tabs 35 creating transverse slot 37 for slidably receiving element 33, including flanges 36. Member 3 is thus permitted to move within member 34 parallel to the plane of the tank wall or top only in the cross ramp direction.

Members 3 can be adapted to secure, in whole or part, insulation panels to tank walls. One such adaptation is shown in FIG. 4. FIG. 4 is a section through support assembly 41, which may be either a two dimension support assembly, such as shown in FIG. 1, or a three dimension support assembly, such as shown in FIG. 2. As well a three-member three dimension support assembly (FIG. 3) could be substituted for two-member support assembly 41. Member 2 of assembly 41 is secured to surrounding support structure 8, for example, by welding or bolting. Base region 42 of member 3 is shaped to include flanges 43 projecting outwardly parallel to wall or top 7. Projecting outwardly from tank wall or top 7 are retainers 44 that include inwardly projecting tabs or flanges 45 for receiving base flanges 43, whereby member 3 may be fixedly secured to wall or top 7. Retainers 44 may comprise, for example, a single piece surrounding member 3 so as to prevent its movement relative to wall or top 7 in any direction. Surrounding member 3 is a U-shaped channel for receiving rigid or semi-rigid insulation panels 46. In this embodiment the U-shaped channel comprises flanged collar 47 secured to member 3 in cooperation with member 3 itself as the channel bottom and flanges (or flange) 43. By this arrangement panels 46 are retained outside the tank wall or top and parallel to its plane. Other adaptations to secure insulation panels utilizing members 3 are within the skill of the art.

Referring to FIG. 5, there is shown semi-membrane tank 51 in a cold condition having bottom 52, front-facing and rearwardly projecting sides 53 and top 54. Also shown for purposes of illustration are edges of sides and top 55 as they would be at ambient temperature. As shown in FIG. 5, walls 53 are joined one another and to bottom 52 and top 54 by radius edges 56 whose intersections are radius corners. Curve 60 represents the curvature of radius edge 56 in the cold condition at the midlength of the rearwardly projecting wall. Tank bottom 52 rests on load-bearing insulation 57. The surrounding support structure includes vertical members 58 spaced outwardly from walls 53 and horizontal members 59 spaced outwardly from top 54. The surrounding support structure also includes horizontal members which are not shown for clarity of illustration. Shown in horizontal rows extending around sides 53 of tank 51 are support assemblies connecting sides 53 to vertical support members 58. One row, the bottom row in this embodiment, consists of two dimension support assemblies 1 (FIG. 1), placed



horizontally and ramping away from the vertical midline of the wall, which extends downwardly from the midpoint of expansion dome 61. In assemblies 1, crosshatching indicates the degree member 2 has become offset from member 3 due to cooling of the tank. Assemblies closest to the midline of the wall have the least offset, and assemblies  
 5 furthest away from the midline have the most offset. The row of assemblies 1 extending circumferentially around the tank provides vertical support for each tank wall. Represented by an "X" is point of thermal fixity 62 of front-facing wall 53. Additional rows of support assemblies are shown on walls 53. These are three dimension assemblies 21 (FIG. 2), also placed to ramp horizontally away from the midline, that is,  
 10 the vertical line running through the point of fixity. In addition to having members 2, 3 offset along the ramp as shown by crosshatching, assemblies 21 have permitted thermal movement in the cross ramp direction (not shown). Shown above the tank, connecting top 54 to horizontal support members 59, is a row of support assemblies 21, placed vertically and ramping away from the midline of top 54 through the center of expansion dome 61. Here again there is more offset between members 2, 3 at the periphery of the  
 15 tank than near the line through the point of fixity of the top, in this case the center of expansion dome 61. Support assemblies for tank top 54 can be arrayed in a grid pattern similar to the pattern depicted for front-facing wall 53. In that case support assemblies along the perpendicular lines passing through the point of fixity would be assemblies 1  
 20 passing ramped away from that point. Additional support assemblies would be assemblies 21 similarly to the arrangement shown for front-facing wall 53.

FIG. 6 shows an alternative embodiment of an array of support assemblies for wall 53 of tank 51 in the cold condition. This embodiment, like the embodiment shown in FIG. 5, includes a row of support assemblies 1 that are placed horizontally and ramp  
 25 away from point of fixity 62. This embodiment further includes additional support assemblies 1 oriented such that they ramp away from point of fixity 62 in radial fashion. Although support assemblies 1 prevent cross ramp movement, the radial orientation shown in FIG. 6 results in movement along the ramp having both a horizontal component and a vertical component parallel to the plane of the wall, thus allowing wall 53 to  
 30 contract both vertically and horizontally toward point of fixity 62. It will be noted that in this embodiment radius edges 56 at top of tank 51 are basically uniform, and there is no

distinctive curvature 60 at the midlength of the walls as there is in the embodiment shown in FIG. 5. Instead, in this embodiment the profile of the rearwardly projecting wall 53 at its midlength is shown by line 63.

FIG. 6 also shows a preferred way to construct an array of support assemblies for a cylindrical tank. FIG. 6 shows a vertical column of vertically disposed support assemblies 1 extending upwardly from point 62. For a cylindrical tank, the circle of thermal fixity would be a circle extending horizontally around the tank wall approximately through point 62. The vertical column of support assemblies 1 would be augmented by an additional vertically disposed assembly at or slightly above point 62. All other support assemblies in FIG. 6 would be replaced by additional vertical columns of support assemblies 1 spaced around the tank wall.

FIG. 7 shows an array of support assemblies 1 on tank top 54 in the cold condition. The array shown in FIG. 7 has assemblies 1 ramping radially away from point of fixity 62, which is the center of expansion dome 61. Also shown in FIG. 7 in cross section is the top row of support assemblies 21 (FIG. 5). In this view the increasing offset of members 2, 3 at the ends of tank wall 53 compared to the midline of the walls can be seen. The array shown in FIG. 7 is suitable for the circular top of a cylindrical tank as well.

We wish to note that the number of support assemblies shown in FIGS. 5-7 is not necessarily the number that would be used for an actual semi-membrane tank. The number and placement will vary depending upon design requirements.

FIG. 8 shows one sidewall 53 with surrounding support structure 58 and interconnecting support assemblies 21 (or 1) suitable for construction outside outer containment structure 80. The preassembly of a semi-membrane tank, surrounding support structure and interconnecting support assemblies can be hoisted by a crane and lowered into an outer containment structure such as an inner hull compartment of an LNG tanker. FIG. 8 shows an outer containment structure 80 fitted with a plurality of vertical keyways 82. Although FIG. 8 shows structure 80 schematically as a wall with keyways, it will be appreciated that structure 80 could as well be multicomponent, as a hull or beam from which vertical supporting members having keyways 82 project inwardly toward surrounding support structure 58. FIG. 8 also shows a series of

vertically extending keys 81 fixedly attached to surrounding support structure 58. FIG. 8 shows one key-keyway pair aligned with the center of thermal fixity, but that is not required. Our preferred construction is that keys 81 are themselves the vertical members of support structure 58. For ease of installation we prefer that keyways 82 and  
5 complementary keys 81 be tapered, that is, larger at the top of the tank. The keys and keyways can be reversed, that is, the keys may be on the outer containment structure and the keyways may be on the surrounding support structure. Keys and keyways can be interlocked in a variety of ways that are within the skill of the art. The system of keys and keyways is provided for at least two opposing planar sidewalls. It may be provided  
10 for some or all additional walls. For a cylindrical wall, the system of keys and keyways is provided for at least two opposing arc sections of the wall, and it may be provided for the entire periphery of the wall.

A number of embodiments of the invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention. For example, such features as loose fits between  
15 interlocking support assembly members, adjustable tilting of sliding surfaces or other means to accommodate manufacturing tolerances or thermal gradients between different locations within a tank, constructing the mating surfaces of the ramps of metal attached to load bearing insulating blocks are all potential variations which are within the possible  
20 alternatives that would be readily apparent to a practitioner skilled in the art. Accordingly, other embodiments are within the scope of the following claims.

**WHAT IS CLAIMED IS:**

- 1 1. A support assembly for attaching a wall or top of a semi-membrane tank to a  
 2 surrounding support structure, said assembly comprising a first member rigidly  
 3 attachable to the surrounding support structure, and a second member rigidly  
 4 attachable to the tank wall or top, wherein the first and second members include  
 5 interlocked complementary angled ramp surfaces slidably engaged in a manner which  
 6 permits movement of the second member relative to the first member in a direction  
 7 parallel to the axis of the ramping surfaces and prevents movement of the second  
 8 member relative to the first member in a direction perpendicular to the ramping  
 9 surfaces.
- 1 2. The support assembly according to claim 1 wherein the interlocked complementary  
 2 angled ramp surfaces are slidably engaged in a manner which prevents movement of  
 3 the second member relative to the first member in the cross-ramp direction.
- 1 3. The support assembly according to claim 1 wherein the interlocked complementary  
 2 angled ramp surfaces are slidably engaged in a manner which permits movement of  
 3 the second member relative to the first member in the cross-ramp direction.
- 1 4. The support assembly according to any of claims 1-3 wherein the second member is  
 2 rigidly attachable to the wall or top through load bearing insulation.
- 1 5. The support assembly according to any of claims 1-4 wherein the second member is  
 2 adapted to secure insulation panels to the tank.
- 1 6. A support system for planar walls of a semi-membrane tank, said support system  
 2 providing a point of thermal fixity for each wall, comprising a vertically extending  
 3 support structure surrounding the tank and an array of support assemblies spaced over  
 4 the outer surface of each wall connecting the wall to the surrounding support  
 5 structure, said array including a plurality of support assemblies according to claim 2  
 6 spaced horizontally from the point of thermal fixity and oriented horizontally with  
 7 their second members ramping away from said point, thereby providing vertical

support for each wall and permitting the second members to move perpendicularly to the plane of the wall and horizontally in the ramp direction parallel to the plane of the wall, and a plurality of support assemblies according to claim 1 spaced over the remaining outer surface of each wall permitting the second members to move perpendicular to the plane of the wall, and move parallel to the plane of the wall both horizontally and vertically toward and away from said point of thermal fixity.

7. The support system according to claim 6 wherein the support assemblies according to claim 1 are disposed such that their second members ramp away from a line extending vertically through the point of thermal fixity.

8. The support system according to claim 6 or claim 7 wherein the support assemblies are rigidly attachable to the walls through load-bearing insulation.

9. The support system according to any of claims 6-8 wherein the center of thermal fixity has no rigid attachment connecting the tank wall to the surrounding support structure.


10. The support system according to any of claims 6-9 wherein the center of thermal fixity of each wall is at its approximate horizontal midpoint and proximate its vertical low point, and wherein the array of supports spaced over the outer surfaces of each wall includes a plurality of support assemblies according to claim 2 spaced radially from, and disposed such that they ramp away from, the point of thermal fixity.

11. A support system for the wall of a cylindrical semi-membrane tank having a cylindrical axis, said support system providing a circle of thermal fixity proximate the bottom of said wall, comprising a vertically extending cylindrical support structure surrounding the tank and an array of vertically disposed support assemblies according to claim 2 spaced over the wall with their second members ramping away from the circle of thermal fixity, thereby providing vertical support for the wall and permitting the second members to move perpendicularly to the cylindrical axis and vertically parallel to the cylindrical axis.


- 1 12. The support system according to claim 11 wherein said array comprises support  
2 assemblies deployed along a series of vertical lines spaced around said wall
- 1 13. The support system according to any of claims 6-12 wherein the tank includes a top  
2 and the surrounding support structure includes a horizontally extending top support  
3 structure above the top of the tank, further comprising an array of support assemblies  
4 according to claim 1 spaced radially over the surface of the top and providing a point  
5 of thermal fixity, said support assemblies having first members rigidly attached to the  
6 surrounding support structure and having second members attached to the top with  
7 ramping surfaces oriented radially away from the point of rigid attachment.
- 1 14. The support system according to claim 13 wherein the second members are rigidly  
2 attached to the top through load-bearing insulation.
- 1 15. The support system according to any of claims 6-10 wherein the tank includes a top  
2 and the surrounding support structure includes a horizontally extending top support  
3 structure above the top of the tank, further comprising a rigid attachment rigidly  
4 securing a point of said top to said top support structure, and support assemblies  
5 according to claim 1 arrayed in a grid pattern across the top.
- 1 16. The support system according to any of claims 6-13 further including vertical keys  
2 and engageable keyways attached to two or more parallel side walls and their  
3 respective surrounding support structure


### ABSTRACT


5           Support assemblies for attaching the walls and top of a semi-membrane tank to  
surrounding support structure include interlocked angled sliding surfaces, whereby  
movement perpendicular to the walls and top is permitted as well as movement along one  
line or two perpendicular lines parallel to the tank sides and top. Arrayed on the surfaces  
of the walls and tops, these support assemblies provide the necessary support for the tank  
10 walls and top while minimizes thermal stresses in the tank. Support systems comprising  
such arrays, surrounding support structure, and tank insulation can be assembled outside  
a ship and engagingly lowered into a compartment therein, facilitating construction..

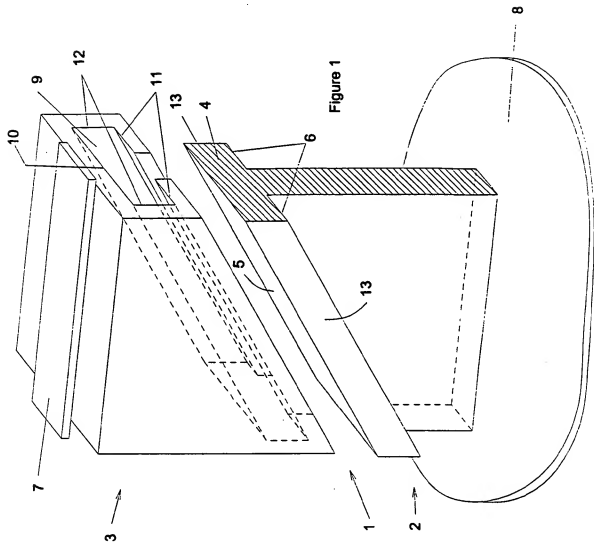



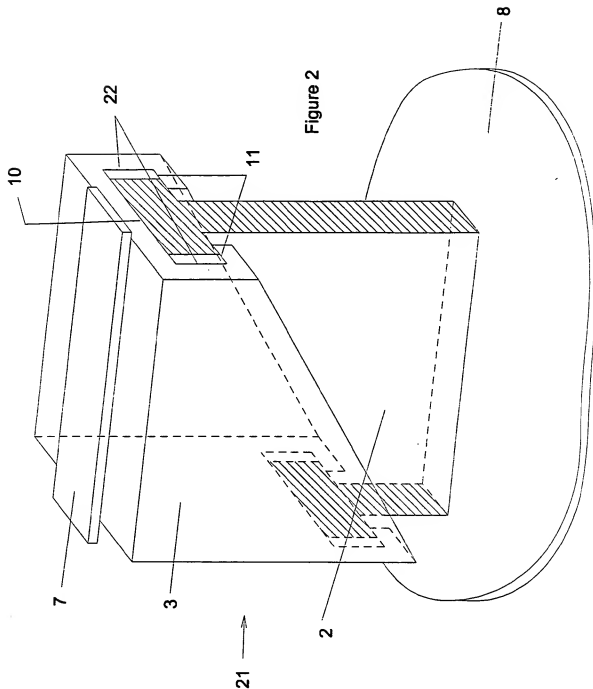

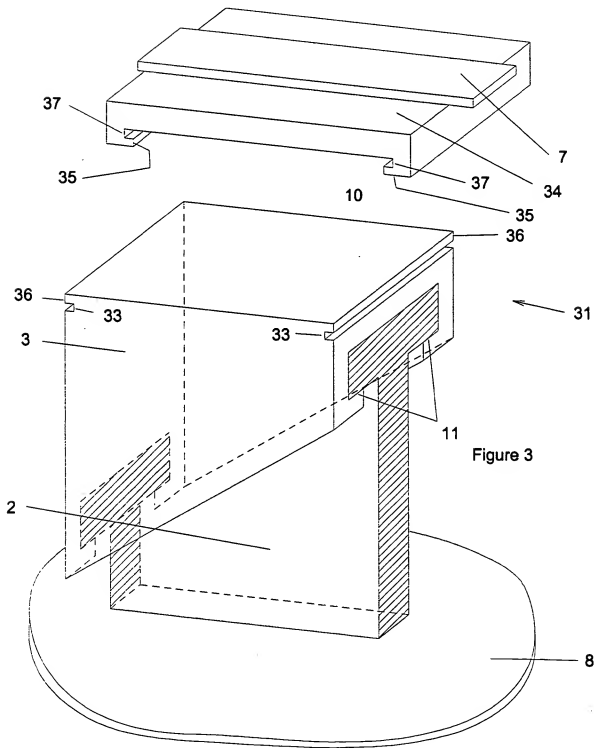

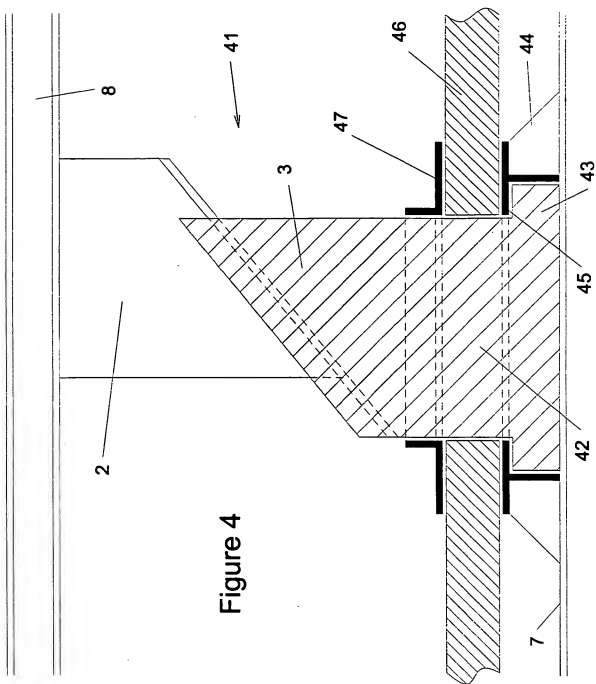

Applicant(s): Robert D. Goldbach and Joseph J. Cuneo  
SUPPORT ASSEMBLIES AND SYSTEMS FOR SEMI-  
MEMBRANE TANKS

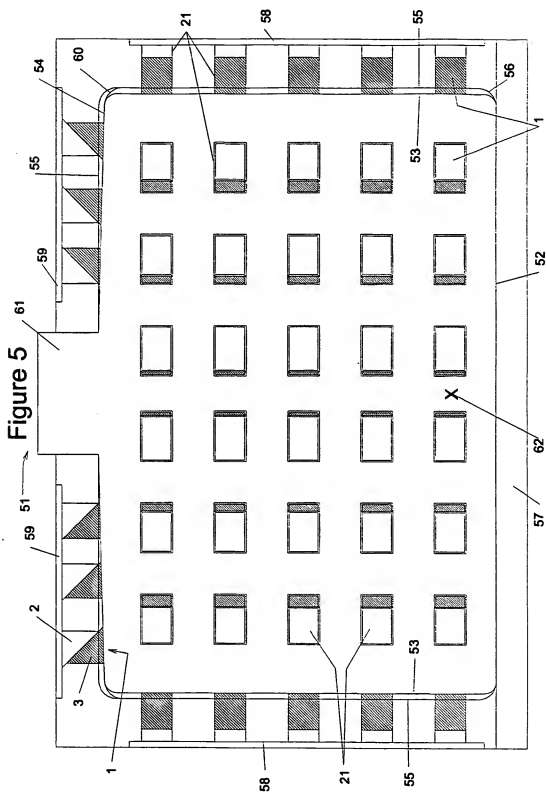


Figure 6

